



COMMERCIAL

## Refrigeration Equipment Reach-In Refrigerator, 1 Glass Door, 23 cu.ft - Stainless Steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Reach-In Refrigerator, 1 Glass Door, 23 cu.ft - Stainless Steel (R290) Refrigeration Equipment



738278 (KCHRI27R1GDR)

1-glass door reach-in refrigerator, stainless steel, 23 cubic feet, R290 refrigerant gas, +33/+41°F - Energy star

### Short Form Specification

Item No. \_\_\_\_\_

1 glass door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side and top panels in painted aluminum, interior bottom panel in 304 stainless steel.

Control with cabinet temperature display. Self-closing door that features lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

### Main Features

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


### Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

### Optional Accessories

- shelf for 27" reach-in  PNC 880590
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_

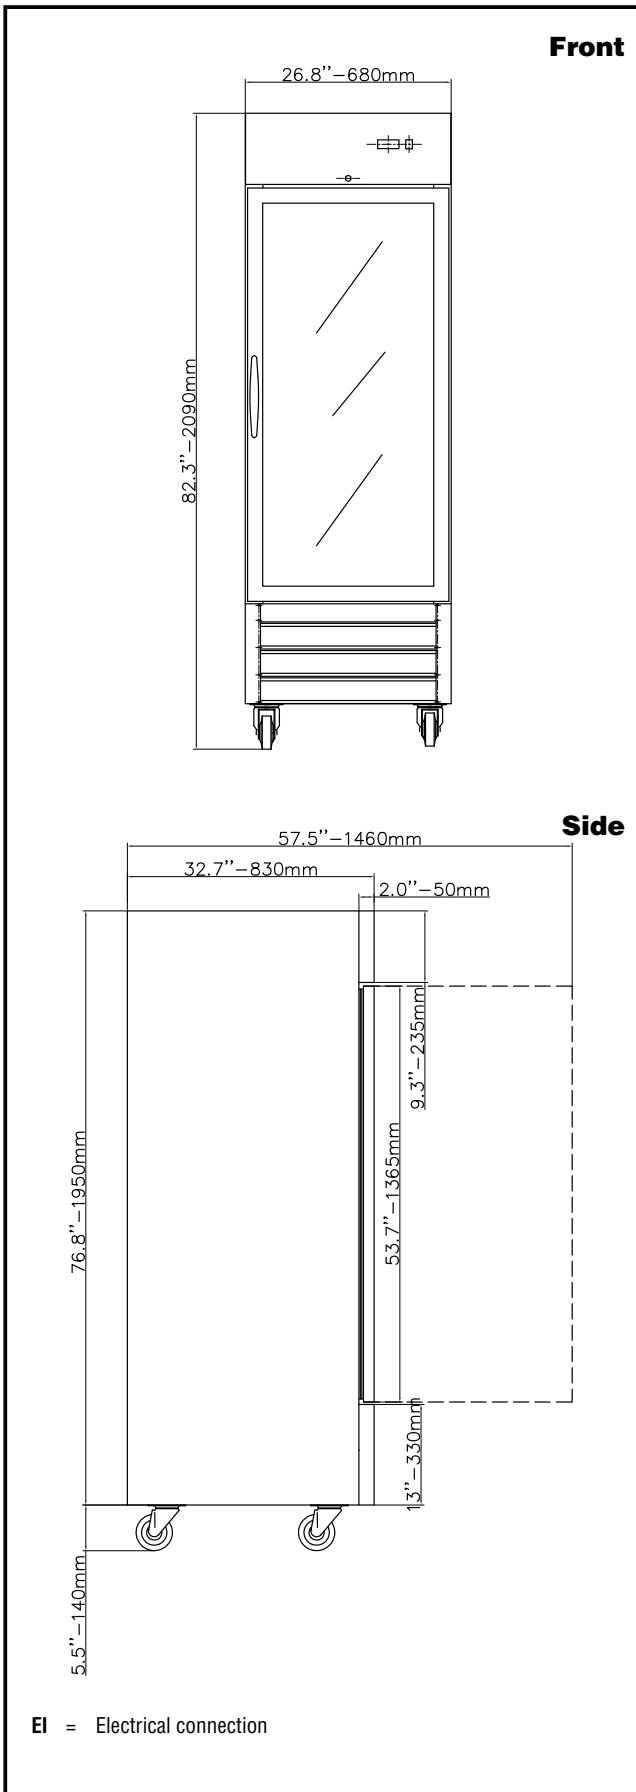

### Electric

Supply voltage:	738278 (KCHRI27R1GDR)	115 V/1 ph/60 Hz
Electrical power, max:		0.8 kW
Current consumption:		8 Amps
Plug type:		USA NEMA 5-15P

### Key Information:

Capacity (Cu. Ft.)	23
Door hinges:	Right Side
External dimensions, Width:	26 3/4" (680 mm)
External dimensions, Depth:	32 11/16" (830 mm)
External dimensions, Height:	82 1/4" (2090 mm)
Number and type of doors:	1 Glass
Internal Dimensions (depth):	27 1/16"
Internal Dimensions (height):	60 1/4"
Internal Dimensions (width):	24 7/16"
Shipping height:	84 5/8" (2150 mm)
Shipping weight:	366 lbs (166 kg)
Shipping volume:	49.91 ft <sup>3</sup> (1.41 m <sup>3</sup> )
Number and type of grids (included):	3 - Vinyl-Coated steel
Type of external material:	430 AISI
Type of internal material:	304 AISI
Warranty:	3 / 5 years

### Refrigeration Data

Compressor Horsepower:	1/6
Refrigerant type:	R290
Refrigerant weight:	85 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost