



COMMERCIAL

## Refrigeration Equipment 2-Sliding Glass Door Full Height Merchandiser Refrigerator 54" Long

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738319 (KCHSGM48R)

2-Sliding Glass Door Full  
Height Merchandiser  
Refrigerator 54" Long

### Short Form Specification

Item No. \_\_\_\_\_

2-sliding glass door refrigerator 41.25" long with exterior back and bottom panel in galvanized steel, exterior side, and top in painted steel; interior back, side top and bottom panels in 304 stainless steel. Electronic control. R290 gas in the refrigeration circuit. ETL Safety and Sanitation certifications. 3/5 Years warranty.

### Main Features



- External digital temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Back bottom mounted cooling unit guarantee an easy access and cleaning.
- Heavy duty Vinyl coated steel shelves.
- Interior LED light to save energy and for best internal visibility.

### Construction


- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Magnetic gasket removable without tools for easy cleaning.
- Pre-wired heavy duty power cord.
- Heavy duty rails for sliding doors

APPROVAL: \_\_\_\_\_

### Front

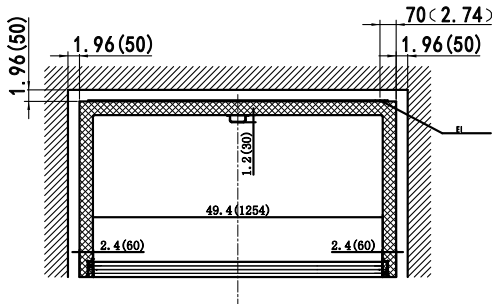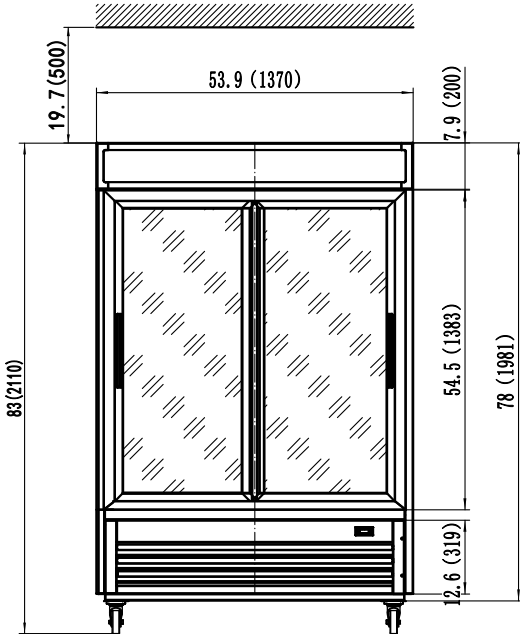

### Side

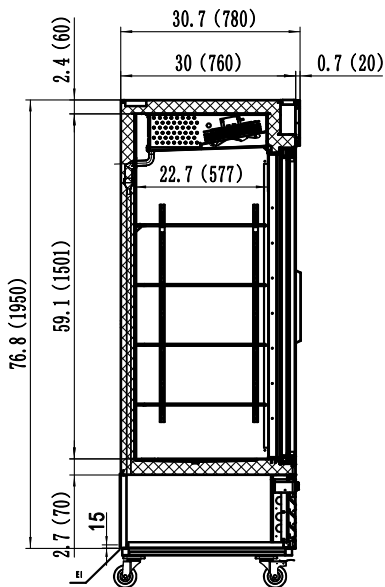

EI = Electrical connection

### Electric

#### Supply voltage:

738319 (KCHSGM48R) 120 V/1 ph/60 Hz

#### Electrical power, max:

0.5 kW

#### Defrost Power

#### Plug type:

USA NEMA 5-15P

#### Maximum Over-Current Protection (MOP):

0A

### Capacity:

Gross capacity: 43.4 cu.feet

### Key Information:

Capacity:	43.4457 cu.ft.
External dimensions, Width:	53 15/16" (1370 mm)
External dimensions, Depth:	31 7/8" (810 mm)
External dimensions, Height:	83 1/2" (2121 mm)
Internal Dimensions (depth):	28 3/8"
Internal Dimensions (height):	61 15/16"
Internal Dimensions (width):	50 "
Shipping height:	85 13/16" (2180 mm)
Shipping weight:	611 lbs (277 kg)
Shipping volume:	96.06 ft <sup>3</sup> (2.72 m <sup>3</sup> )

### Refrigeration Data

Operating temperature min.:	35.1 °F
Operating temperature max.:	39 °F

### Sustainability

Current consumption:	4.5 Amps
Refrigerant type:	R290