



COMMERCIAL

Refrigeration Equipment 6 Tub Ice Cream Dipping Cabinet R290

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738372 (KCICDC6FH)

6 Tub Ice Cream Dipping
Cabinet -0.4°F/-4°F -R290

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (6) barrel ice cream tub frames. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Included as standard 1 NSF® certified temperature gauge and 6-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Mechanical control with adjustable temperature.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Construction

- Tempered glass viewing pains & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

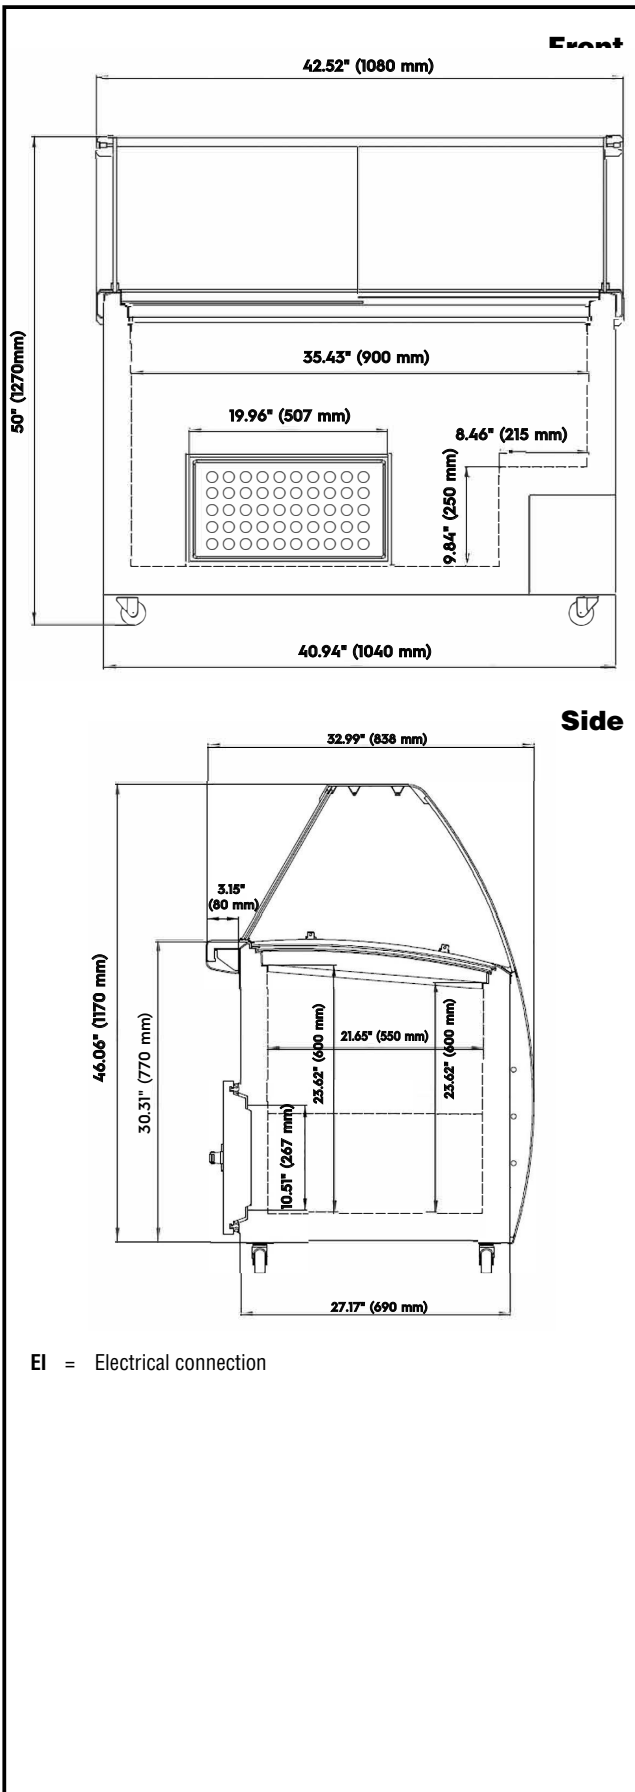

Electric

Supply voltage:

738372 (KCICDC6FH) 120 V/1 ph/60 Hz

Electrical power, max:

0.2 kW

Plug type:

USA NEMA 5-15P

Maximum Over-Current Protection (MOP):

0A

Key Information:

Capacity:

10.5944 cu.ft.

External dimensions, Width:

47 5/8" (1210 mm)

External dimensions, Depth:

39 9/16" (1005 mm)

External dimensions, Height:

51 9/16" (1310 mm)

Internal Dimensions (depth):

23 5/8"

Internal Dimensions (height):

35 7/16"

Internal Dimensions (width):

21 5/8"

Shipping height:

53 15/16" (1370 mm)

Shipping weight:

392 lbs (178 kg)

Shipping volume:

61.24 ft³ (1.73 m³)

Type of external material:

Prepainted white

Type of internal material:

White Prepainted Steel

Approvals

;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:

-40 °F

Operating temperature max.:

-9.9 °F

Refrigerant type:

Sustainability

Current consumption:

Refrigerant type:

R290