



COMMERCIAL

## Refrigeration Equipment Bar Equipment 2-door Refrigerator, 48" (R290) stainless steel door


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

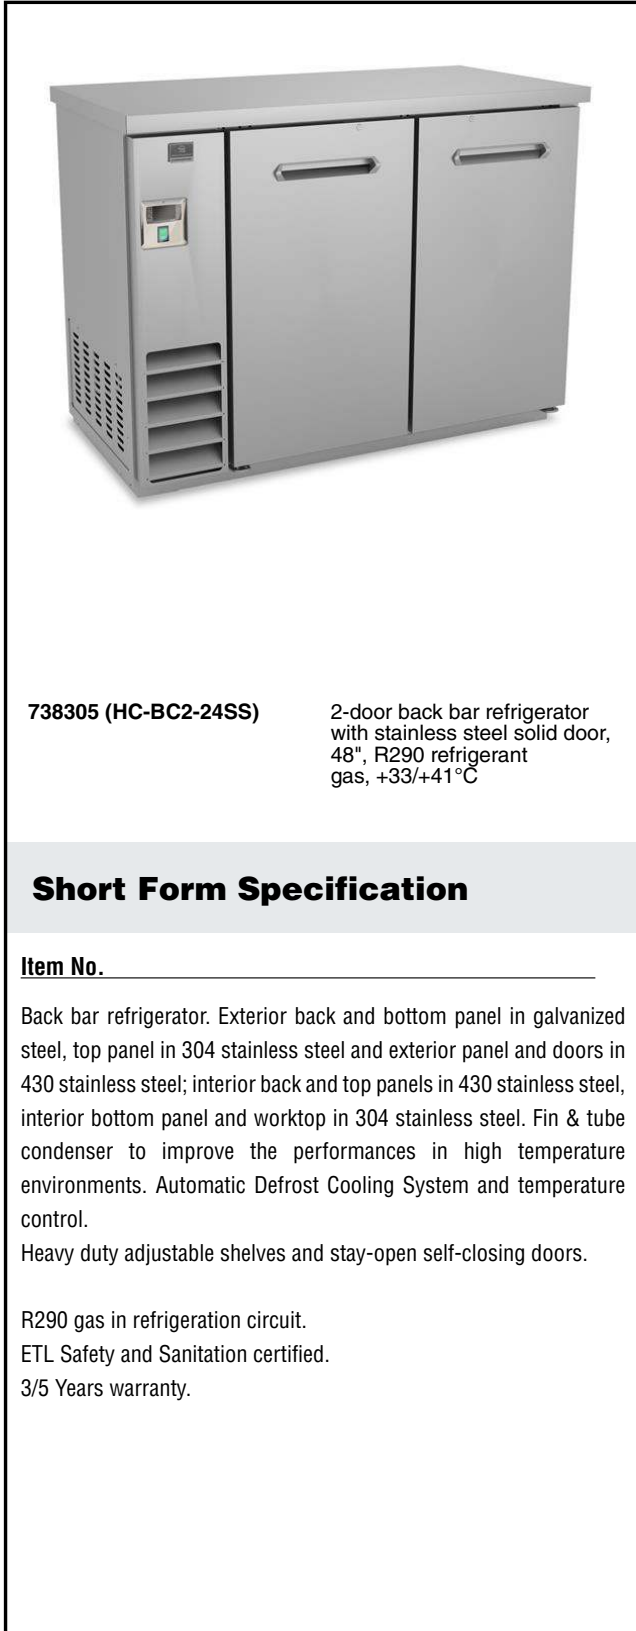

738305 (HC-BC2-24SS)

2-door back bar refrigerator with stainless steel solid door, 48", R290 refrigerant gas, +33/+41°C

### Short Form Specification

Item No. \_\_\_\_\_

Back bar refrigerator. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel and doors in 430 stainless steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control.

Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

### Main Features

- External digital temperature display.
- External temperature display.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


### Construction

- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

### Optional Accessories

- two shelves for 48" back bar (one right and one left shelves)  PNC 880608
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_

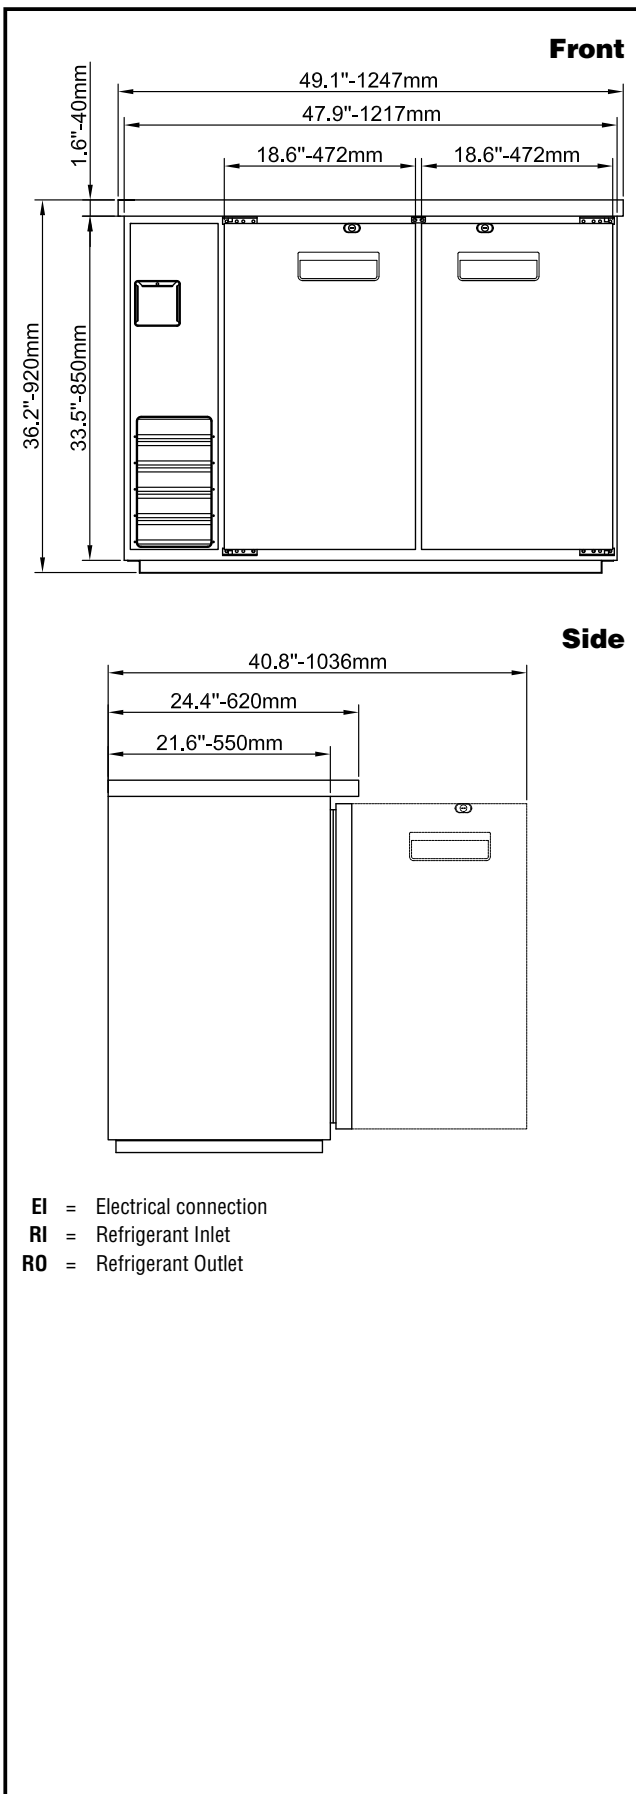

## Electric

Supply voltage:	738305 (HC-BC2-24SS)	115 V/1 ph/60 Hz
Electrical power, max:		0.3 kW
Current consumption:		3 Amps
Plug type:		USA NEMA 5-15P

## Capacity:

Gross capacity:	12.5 cu.feet
-----------------	--------------

## Key Information:

Door hinges:	1 Left+1 Right
External dimensions, Width:	49 1/16" (1247 mm)
External dimensions, Depth:	24 7/16" (620 mm)
External dimensions, Height:	36 3/16" (919.48 mm)
Number and type of doors:	2 Full
Internal Dimensions (depth):	28 15/16"
Internal Dimensions (height):	18 1/2"
Internal Dimensions (width):	36 1/4"
Shipping height:	41 5/16" (1050 mm)
Shipping weight:	273 lbs (124 kg)
Shipping volume:	32.45 ft <sup>3</sup> (0.92 m <sup>3</sup> )
Number and type of grids (included):	4 - Vinyl-Coated Steel
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

## Refrigeration Data

Compressor Horsepower:	1/5
Refrigerant type:	R290
Refrigerant weight:	110 g
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube

Refrigeration Equipment  
Bar Equipment 2-door Refrigerator, 48" (R290) stainless steel door

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

