

Item:	
Quantity: _	
Project:	

# **Salamander Broiler**

Models: ☐ RSB-24 ☐ RSB-36	☐ RSB-48
---------------------------	----------



Gas Type: <u></u> Nat	ural 🗌 LP	
Elevation (if above 2000 ft.):		
☐ Range Mount ☐ Wall Mount		
Range Width:	"	
(Range width necessary to determine		
bracket type. Width of Salamander		
cannot exceed range width )		

### **Standard Features**

- Full width, removable stainless steel crumb pan for easy cleaning
- Stainless steel front and sides
- Individually adjustable infra-red burners provide powerful radiant heat
- Spring balanced broiler grid moves up and down with positive locking in three positions
- Standing pilots for instant safe ignition
- Easy loading and unloading with a roll-out carriage
- Stainless steel tubing for pilots

## **Options and Accessories**


☐ 3/4" gas connection from range to RSB












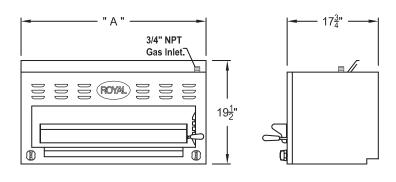

Model Number	Width (A)	Number of Burners	Total BTU	Ship Weight
RSB-24	24"	1¹	17,500	160 lbs.
RSB-36	36"	21	35,000	210 lbs.
RSB-48	48"	2 <sup>2</sup>	40,000	252 lbs.

#### Notes:

- Infra-red burners rated at 17,500 BTU/hr each.
- 2. Infra-red burners rated at 20,000 BTU/hr each.

#### **Gas Connection:**

3/4" NPT on the right hand rear of the appliance. The pressure regulator (supplied) is to be connected by the installer.

#### **Gas Pressure:**

5" W.C.	Natural Gas
10" W.C.	Propane

#### Clearances:

	Combustible	Non-Combustible
Rear	4"	0"
Sides	4"	0"

Specify type of gas and altitude, if over 2,000 feet, when ordering.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.