



COMMERCIAL GAS RANGES

Comstock-Castle R Series Range Features

The Comstock-Castle R-Series Commercial Gas Ranges come standard with powerful 30,000 BTU cast-iron burners with lift-off head for easy cleaning & standing pilots. 12" x 12" removable cast iron top grate. Stainless steel front, back splash and shelf with matching G90 galvanized sides is standard finish. The unit comes standard with 6" adjustable legs or casters and a 3/4" NPT gas connection. Ovens come with 2 easy to remove oven racks and complete porcelain oven liner for easy cleaning. Heavy duty compression spring door hinge system which adds to durability and a longer life. The thermostat ranges from 200-500 F and has a flame failure safety device. The thermostat ranges from 200-500 F and has a flame failure safety device.

24", 36" & 60" MODELS

| Model | Width | # of Ovens | # of Top Burners | Griddle Width |
|--------|-------|------------|------------------|---------------|
| R4 | 24" | 1 | 4 | - |
| R6 | 36" | 1 | 6 | - |
| R6-12 | 36" | 1 | 4 | 12" |
| R6-24 | 36" | 1 | 2 | 24" |
| R10 | 60" | 2 | 10 | - |
| R10-24 | 60" | 2 | 6 | 24" |



- Easy cleaning Lift off Burner Heads
- Individual Pilots for fast, precise top burner lighting
- Heavy Duty 12" x 12" removable cast iron grates
- Flame adjustable control knobs
- 30,000 BTU oven burner
- Cool to touch oven door handle
- 2 adjustable oven racks


- Compression spring door system
- Flame Failure safety device
- Adjustable thermostat 200F-500F
- Heavy Duty steel frame
- Stainless Steel front- 24.75" back riser
- Removable crumb tray
- 3/4" gas connection



Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301
Tel.: 217-223-5070 • Fax.: 217-223-0007 • Web: www.castlestove.com



- A pressure regulator is provided with this unit.
Natural Gas 4.0" (102 mm) W.C.
Propane Gas 10.0" (279 mm) W.C.
- Gas connection is 3/4" NPT (19mm) rear gas connection.

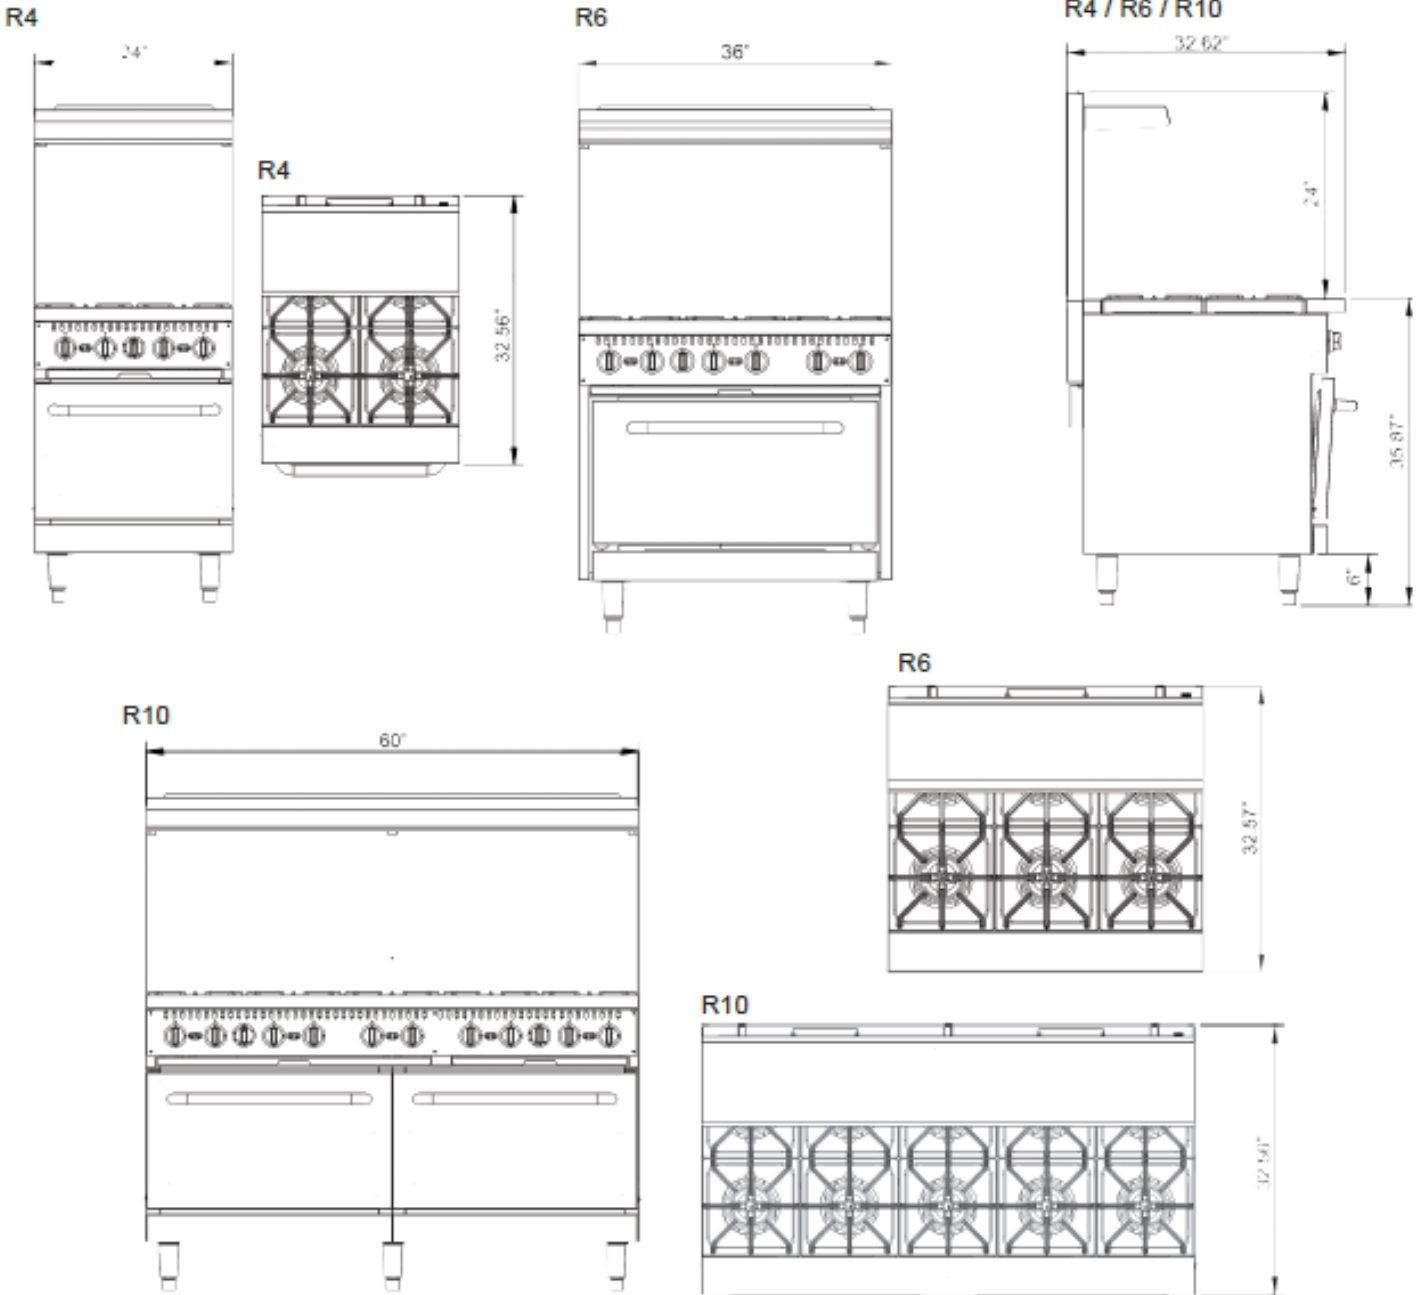

| Model | Burners | External Dimensions | | | Internal Oven Dimensions | | | BTU's (per burner) | BTU's (per oven) | Total BTU's | Crated Weight (lbs) |
|-------|---------|---------------------|------|-----------|--------------------------|------|------|--------------------|------------------|-------------|---------------------|
| | | W | D | H | W | D | H | | | | |
| R4 | 4 | 24 | 32.6 | 35.9+24.6 | 20.6 | 25.8 | 13.7 | 30,000 | 30,000 | 150,000 | 356 |
| R6 | 6 | 36 | 32.6 | 35.9+24.6 | 26.8 | 25.8 | 13.7 | 30,000 | 30,000 | 210,000 | 455 |
| R10 | 10 | 60 | 32.6 | 35.9+24.6 | 26.8 | 25.8 | 13.7 | 30,000 | 30,000 x 2 | 360,000 | 737 |



Comstock-Castle Stove Co. • 119 W. Washington St. • Quincy, IL. 62301
Tel.: 217-223-5070 • Fax.: 217-223-0007 • Web: www.castlestove.com

