



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model: \_\_\_\_\_

# TOP MOUNT REACH-IN REFRIGERATORS

MODEL:  MCRT-23FDHC  MCRT-49FDHC  MCRT-72FDHC



MCRT-23FDHC



MCRT-49FDHC



MCRT-72FDHC


Maxx Cold reach-in refrigerators are constructed from stainless steel, engineered with digital controls and polyurethane insulation for optimal temperature control and easy maintenance. Available in 1, 2 and 3 door configurations, each model features recessed handles, door locks and PE coated wire shelving with storage space for full size sheet pans.

## FEATURES AND CONSTRUCTION

- Stainless steel exterior and interior
- Self-closing door(s) with easy to grip recessed handle(s)
- Field reversible door on single door model
- Automatic interior lighting
- Lock and key set for security
- Adjustable heavy-duty wire shelves (3 per section/door)
- Four (4) or six (6) 4" diameter swivel casters
- Electronic control panel with digital display
- Automatic defrost system
- Open door alert beeps if door has been open for five minutes
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency

## ELECTRIC

115V / 60Hz / 1Ph  
(230V / 50-60Hz / 1Ph is available as an option)  
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

## 3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Meets Energy Star Guidelines  
MCRT-23FDHC / MCRT-49FDHC

## MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at  
TechnicalServices@TheLegacyCompanies.com or 877.368.2797


## TEMPERATURE

Holding temperature ..... 33°F to 41°F (1°C to 5°C)

- Digital control system maintains optimum temperature
- Large evaporator and condenser for quick cooling and greater efficiency



# MAXX COLD TOP MOUNT REACH-IN REFRIGERATORS

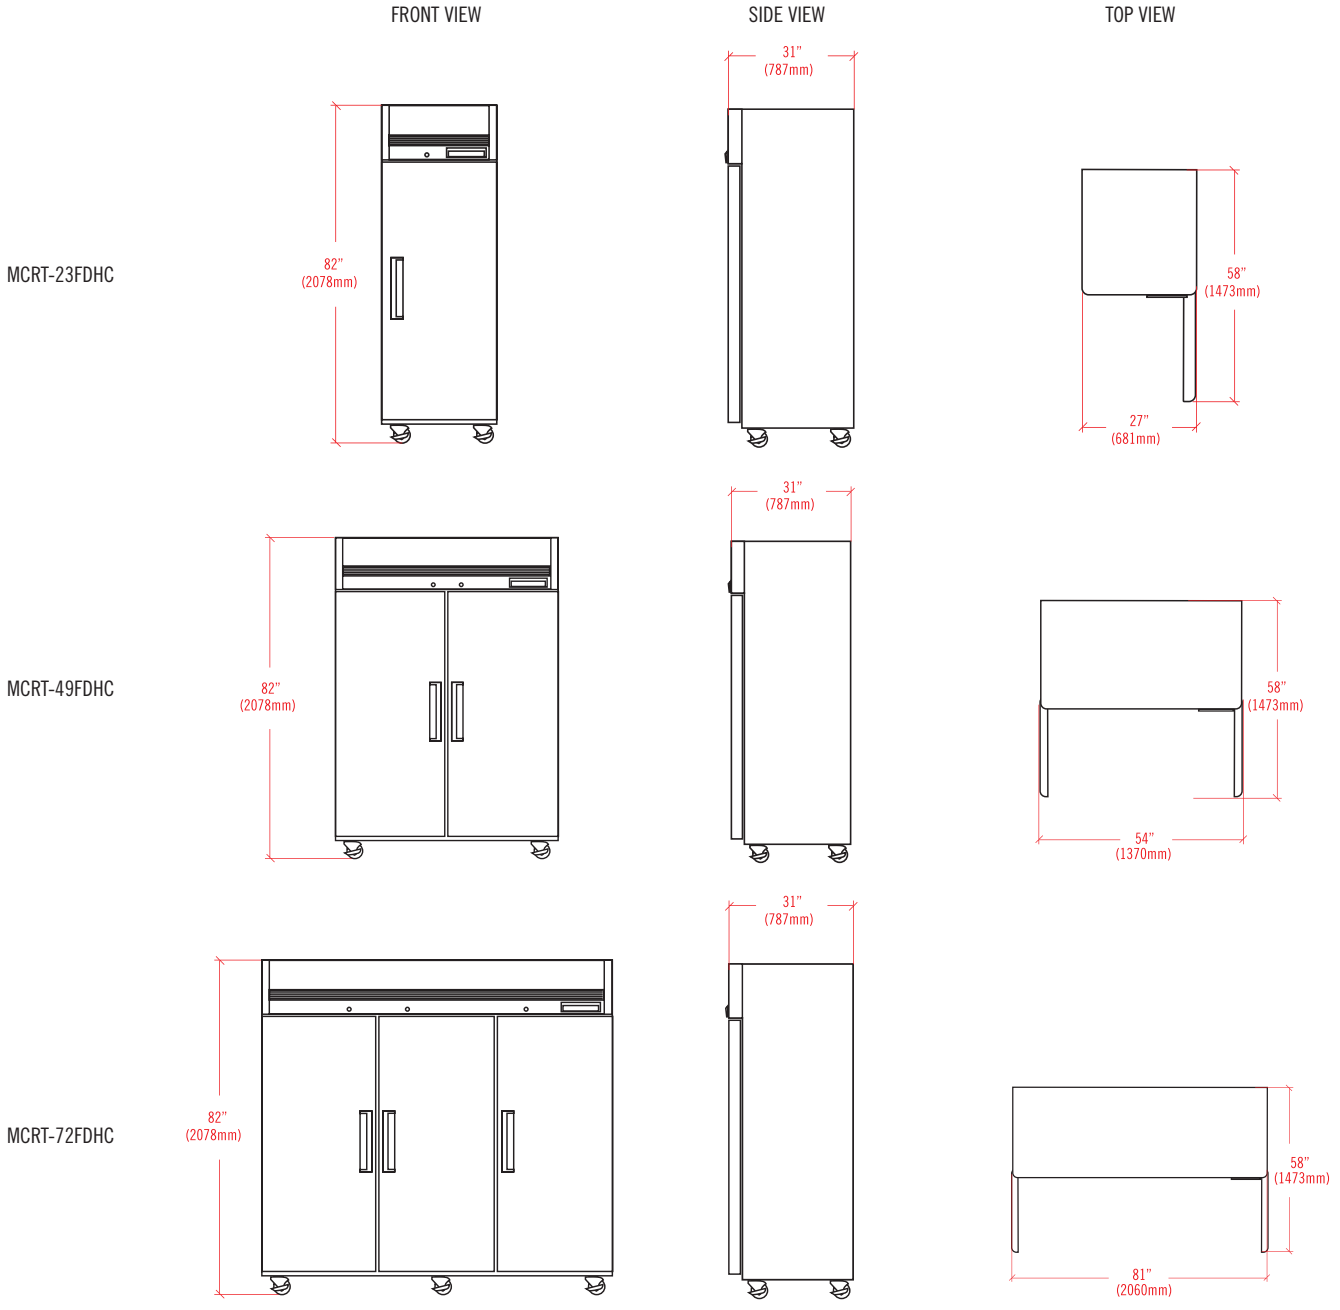

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	HP	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MCRT-23FDHC	27" x 31" x 82" (681 x 787 x 2078 mm)	22.8" x 24.1" x 53.7" (578 x 613 x 1364 mm)	18.9 Cu Ft (535 L)	33°F to 41°F (1°C to 5°C)	3.0A	1/4	264 lbs (120 kg)	R-290a 2.61 oz (74 g)	1 / 3	115V / 60Hz / 1Ph
MCRT-49FDHC	54" x 31" x 82" (1370 x 787 x 2078 mm)	49.8" x 24.1" x 53.7" (1264 x 613 x 1364 mm)	42.8 Cu Ft (1212 L)	33°F to 41°F (1°C to 5°C)	3.2A	1/4	388 lbs (190 kg)	R-290a 3.67 oz (104 g)	2 / 6	115V / 60Hz / 1Ph
MCRT-72FDHC	81" x 31" x 82" (2060 x 787 x 2078 mm)	77.3" x 24.1" x 53.7" (1963 x 613 x 1364 mm)	66.7 Cu Ft (1889 L)	33°F to 41°F (1°C to 5°C)	6.3A	1/2	567 lbs (257 kg)	R-290a 5.22 oz (148 g)	3 / 9	115V / 60Hz / 1Ph

## INSTALLATION

- Shorter caster options are available to lower the overall height of the unit