



COMMERCIAL

Refrigeration Equipment 4 Tub Ice Cream Dipping Cabinet R290

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738371 (KCICDC4FH)

4 Tub Ice Cream Dipping
Cabinet -0.4°F/-4°F -R290

Short Form Specification

Item No. _____

Front of the house display ice cream or gelato dipping cabinet. Exterior & interior panels stainless steel painted white, bottom panel is galvanized steel, top panel is galvanized material painted white to match. Fin & tube condenser to improve the performances in high-temperature environments. Automatic Defrost Cooling System and temperature control. Includes (1) NSF® certified temperature gauge, and (4) gelato pan and/or (4) barrel ice cream tub frames. Front is radius white plastic, lit from behind, for customer supplied signage if desired. Additional freezer storage on operator side.

Main Features

- Temperature range of -4 to +4 F°
- Fan cooled condenser to cope with heavy duty conditions
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Included as standard 1 NSF® certified temperature gauge and 4-barrel ice cream tub frame.
- Bottom drain with plug for easy interior cleaning and defrost water discharge
- Mechanical control with adjustable temperature.
- Low energy consumption thanks to high efficiency components, insulation and optimized airflow.

Construction

- Tempered glass viewing pans & sliding lids
- Plexiglass sliding shields.
- Exterior and Interior finish in white
- Locking lids and key protect the contents of the unit.
- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.


APPROVAL: _____

Part of



Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

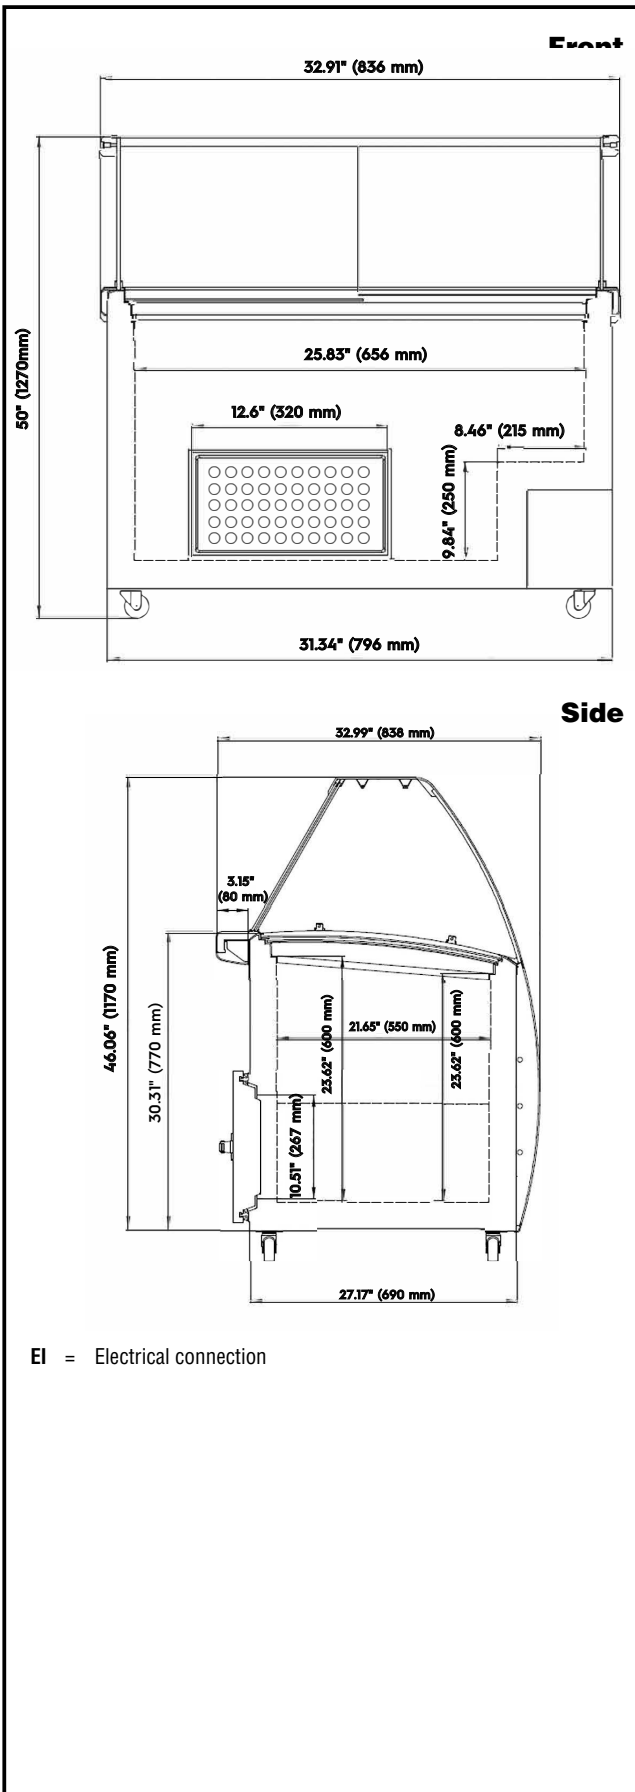

EI = Electrical connection

Electric

Supply voltage:	738371 (KCICDC4FH)	120 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Plug type:		USA NEMA 5-15P

Key Information:

Capacity:	7.4161 cu.ft.
External dimensions, Width:	38 " (965 mm)
External dimensions, Depth:	39 9/16" (1005 mm)
External dimensions, Height:	51 9/16" (1310 mm)
Internal Dimensions (depth):	23 5/8"
Internal Dimensions (height):	25 13/16"
Internal Dimensions (width):	21 5/8"
Type of external material:	Prepainted white
Type of internal material:	White Prepainted Steel
Approvals	;ETL C&US;ETL SANITATION

Refrigeration Data

Operating temperature min.:	-40 °F
Operating temperature max.:	-9.9 °F
Refrigerant type:	

Sustainability

Current consumption:	
Refrigerant type:	R290