Blueain by BLUENIX

MODEL BSF72-HC BOTTOM MOUNT REACH-IN FREEZER

Sleek and durable cooling solution for your food and beverages.





Stainless steel cabinet construction

Stainless steel interior and exterior (galvanized steel back & bottom).



Temperature range between -10°F ~ 5°F Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290) Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



Visual and audible door open alarm Alarm sounds when doors are not completely closed to protect against food spoilage






Cabinet construction

- Cyclopentane Insulation Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- 4 shelves per compartment.
- Six (6) casters which two (2) have front brakes


Refrigeration

- Self-contained system, bottom mounted compressor.
 Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Bottom mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Innovative hot gas frame heating system reduces condensation and increases energy.

Front view

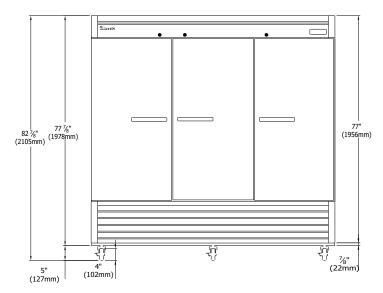

Side view

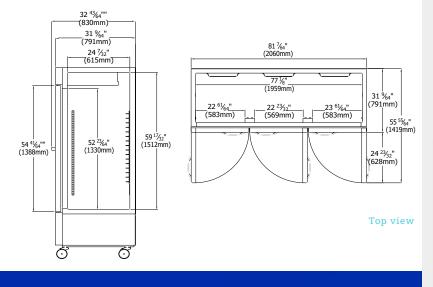

MODEL BSF72-HC BOTTOM MOUNT REACH-IN FREEZER



Doors

- Self-closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°.
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles.
 (Ni-Cr Plated)
- Door designed to open easily.
- Doors built with pressure and with pressure relievers to
- eliminate vacuum pressure.
- Standard door locks.

Design & Features

Self-diagnostic digital temperature control & monitor system.
Digital display allows for easy monitoring.

Digital controls include manual defrost for easy maintenance.
Rounded corner design gives a stylish appearance and reduces chances of injury.

Optional Features & Accessories

2.5" diameter casters available 6" adjustable legs available

· Additional shelves are available.

Doors	3
Capacity Cu.Ft.	72
Shelves	12
Refrigerant	R-290
Temperature Range	-10°F ~ 5°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
Lighting	LED Interior lighting
HP	1
Voltage	115∨/60Hz
Amps	9.9
NEMA Config.	NEMA 5-15

BLUENIX

Blue Air has right to change specifications without further notice.

blueairfse.com



orders@blueairfse.com

1-886-677-8500



223 W. Rosecrans Ave., CA 90248 T: 310-808-0102 9 W. Shelton Terrace #A, Hillside, NJ 07205 T: 908-688-0970